



LOW PROFILE TELEDUMPER

MODEL TD-50

47.8 metric tonne • 52.7 short ton payload — 29.8 m³ • 39.0 yd³ capacity



FEATURES

- Field-proven, articulated underground 4-wheel drive DUX TD-50 Teledumper brings high capacity hauling to areas previously limited to scoop loaders with effective loading and dumping in headings as low as 3.9 m (12' 11")
- Patented telescopic dump box with sealed sections retains slurry without leakage and distributes payload evenly – excellent load retention on steep grades guaranteed
- Highest power to weight ratio in its class
- Field proven Dana SOH powertrain
- Electronically controlled engine reduces fuel consumption and ventilation requirement
- Equipped with 4-wheel POSI-STOP brake system for maximum safety, reliability and low maintenance cost
- Centralized service points and modular design for easy service access and fast component exchange
- Excellent service and parts back-up worldwide

WEIGHTS

Payload47.8 tonne.....52.7 ton
 Machine weight, approx.....40.2 tonne.....41.1 ton
 GVW 88.0 tonne..... 93.8 ton

SAE VOLUME WITH TAILGATE

Struck 25.1 m³.....32.8 yd³
 Heaped 29.8 m³.....39.0 yd³
 Ore weight..... 1.7 t/m³.....2,871 lb/yd³
Custom box size to suit different ore weight available.


OVERALL DIMENSIONS

Length..... 11 580 mm.....38' 0"
 Width with tailgate 3 500 mm..... 11' 6"
 Height over box sides..... 3 125 mm..... 10' 3"
 Height over canopy or cab3 500 mm..... 11' 6"


TURNING RADIUS AT 43°

Inside..... 5 235 mm..... 17' 2"
 Outside..... 9 500 mm..... 31' 2"


TD-50 OPERATING CYCLE

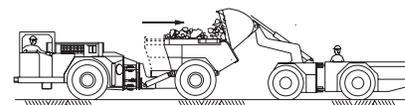


REAR LOADING BY SMALL SCOOP TO FILL RETRACTED FRONT

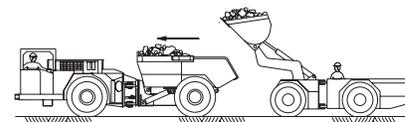

TELESCOPIC ACTION MOVES LOAD AHEAD

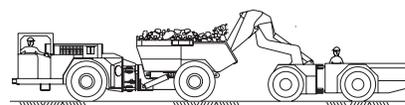

COMPLETION OF LOADING FROM THE REAR

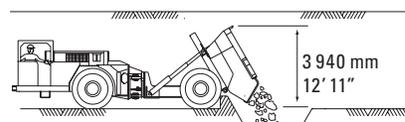

TELESCOPIC ACTION ALLOWS FOR DUMPING IN LOW HEADINGS



DUX Model TD-50 Low Profile Teledumper

TECHNICAL SPECIFICATIONS*

Engine

Make and model Cummins X15 electronic
Derated power 410 kW (550 HP) @ 2100 RPM
Cylinders 6
Aspiration Turbocharged and charge air cooled (Cummins VGT)
Displacement 14.9 L 912 in³
Starter 24-volt electric
Air intake cleaner Direct Flow Air Cleaner
Exhaust aftertreatment DOC, DPF and SCR technology in a two-piece unit
Cooling Large-sized integrated water radiator charge air
..... cooler
Emission standard Meets EPA Tier 4 Final, Euro Stage V

Torque Converter

Make and model Dana SOH CL 8672 series, single stage with
..... automatic lock-up and flex plate drive

Transmission

Make and model Dana SOH 8821H series,
Speeds 7 in forward and 4 in reverse

Axles

Make and model Dana SOH 53R300 with high traction differential
..... and POSI STOP brakes on all 4 wheel ends

Tires

– Bridgestone 29.5R29, multi-star, E-4, VSNT tubeless radial

Brakes

Service and 4-wheel POSI-STOP totally enclosed multi-disc,
emergency/parking liquid cooled, spring applied hydraulically released
..... with its own independent circulating cooling
..... system and accumulator back-up
Automatic Brake Applies brake in case of engine failure or pressure
Applicator (ABA) drop in torque convert

Steering

– Articulated frame hydraulic power steering
– $\pm 43^\circ$ steering angle each way for a total of 86°

Oscillation

– $\pm 10^\circ$ center of oscillation for a total of 20°
– Large sized, heavy-duty roller bearing for minimum maintenance and a
smooth ride, 4-wheel ground contact guaranteed

Frames and Pins

– Articulated heavy-duty frames made to withstand the high impact and
torsional stress associated with mining application
– Frames come with five-year unlimited hour guarantee
– Large high tensile alloy steel pins in replaceable anchor bushings

Teledump Body

– Extra heavy-duty 2-section design with double acting telescopic dump
cylinders (2) and ejector cylinders (2) made from impact wear-resistant
alloy steel plates that are reinforced, prolongs service life substantially
– Supported on rugged tipping frame, telescopic action guided by heavy-

duty bottom roller bearings (2) that run along hardened tracks and extra
heavy-duty adjustable/replaceable slide arrangements (2) on top of box

Operator Compartment

– Side seated for maximum visibility and bi-directional operation
– Heavy-duty adjustable suspension seat with arm rests and retractable seat belt
– Shock mounted compartment for maximum comfort
– All controls and gauges located within easy reach and view of operator

Hydraulic System

– Heavy-duty double acting protected steering cylinders (2)
– Heavy-duty double acting two-stage fully protected telescopic dump
cylinders (2) with hard chrome plated stems
– Heavy-duty ejector cylinders (2)
– Heavy-duty PTO-driven variable displacement piston pumps with load
sensing driven from torque converter
– Suction filter
– Inline high pressure filter with service gauge
– $\frac{3}{4}$ " inside diameter and over hoses that are four-spiral wire braid and
have crimped hose end swivel fittings. Hose bulk-head located mid-ship

Tank Capacities

Fuel 645 L 170 US gallons
Hydraulic oil 340 L 90 US gallons
Brake cooling oil 151 L 40 US gallons

Electrical System

– 24-volt negative ground
– 75 amp alternator with integrated sealed voltage regulator
– Main electric cut-off switch
– Heat resistant, waterproof, sealed electric PMA wire harness
– Sealed junction box and stainless steel instrument panel box with multi-
stem connectors
– Semi-automatic circuit breakers
– Front (4), rear (2), and all-directional (1) LED high-intensity lights
– Heavy-duty batteries (2)
– Signal horn and audible, adjustable back-up alarm

Standard Features

Cummins X15, EPA Tier 4 Final, Euro Stage V electronic engine • PRAN
display monitor includes digital fuel gauge • Automatic engine shut-off at
low oil pressure and high temperature • Hourmeter • All necessary gauges
for engine, converter and brake pressure • Wheel chocks (2) with storage
brackets (2) • 9 kg (20 lb.) hand held fire extinguisher • Neutral engine start
protection • Centralized manual lubrication mid-ship • Dump box and ar-
ticulation safety bars • Parts/Operator/Maintenance manuals • Compliant
with MSHA, CANMET and CE regulation

Options

Different engine • Engine brake • Certified FOPS/ROPS canopy • Fully
equipped certified FOPS/ROPS noise suppression cab • Automatic tailgate
• Automatic lubrication system • Fire suppression system • Video system •
Dump body • Spare rim assembly • Cold weather package • Knock-down
construction for lowering unit down mine shaft • OTHER OPTIONS ON
REQUEST